


WAND- UND DECKENLAUTSPRECHER WALL AND CEILING SPEAKER

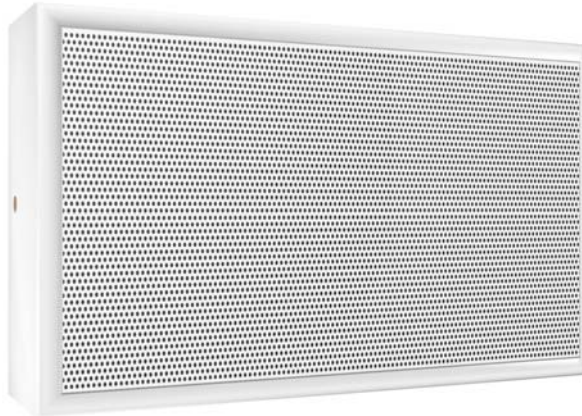

Der Aufputzlautsprecher WDW-2000 im Holzgehäuse ist geeignet zur Musik- und Sprachübertragung. Ballwurf- und Diebstahlsicherung wird durch entsprechende Bauteile gewährleistet. Zum Lieferumfang gehören Schrauben, Dübel und der Befestigungsbügel aus Aluminium.

Diese Lautsprecher sind auch in den Versionen **A/B** mit Doppelschwingspule und **BS5839** lieferbar.

- Für A/B als Zusatzoption „**AB-DS**“ angeben.
- Für BS5839 als Zusatzoption „**BS**“ angeben.

The loudspeaker WDW-2000 for surface mounting features a wooden housing and is suitable for music and speech transmissions. Ball-proof and anti-theft protections are ensured by suitable mounting components. Delivery includes screws, wall plugs and mounting bracket made of aluminium.

This speakers you can order in a **A/B** with double cone and **BS5839** version.

- For A/B you write „**AB-DS**“.
- For BS5839 you write „**BS**“.

Modell	Typ	WDW-2000	WDW-2000-10
Nennbelastbarkeit	load rating	6 W/100 V	10 W/100 V
Nennimpedanz	impedance	1667 Ω	1000 Ω
Anpassungen	transformer matching	6/3/1,5	10/5/2,5
Schalldruck (1 W/1 m)	sound pressure level (1 W/1 m)	93 dB	93 dB
max. Schalldruck (1 m)	max. sound pressure level (1 m)	101 dB	103 dB
Übertragungsbereich (-10 dB)	frequency range (-10 dB)	80 – 19 000 Hz	80 – 19 000 Hz
Abstrahlwinkel	transmission angle	180°	180°
Maße (mm)	dimensions (mm)	265 x 165 x 88	265 x 165 x 88
Gewicht	weight	1,6 kg	1,8 kg
Anschluss	connection	4-polige Druckklemme 4-pole press connector	4-polige Druckklemme 4-pole press connector
Farbe	color	weiß RAL 9010 white RAL 9010	weiß RAL 9010 white RAL 9010